



**ALPER  
ELEKTRONİK**

**HB ALPER ELEKTRONİK**


Mersin-Tarsus Organized Industrial Zone 2. Street No:28  
Tel. +90 324 676 4486-87 Faks: +90324 676 4426  
www.alperelektronik.com.tr

MAKİNA San.Ve Tic.Ltd.Şti.  
MERSİN/TÜRKİYE  
info@alperelektronik.com.tr  
www.meshmatic.com  
www.collmatic.com

**BRAND: MESHMATIC**

**MODEL: HKM 26 P 12**

Width of the panel 26- (2600mm) Line wire feeding method P- (Automatic from pulleys) Weldable diameter 12- max.12mm-12mm

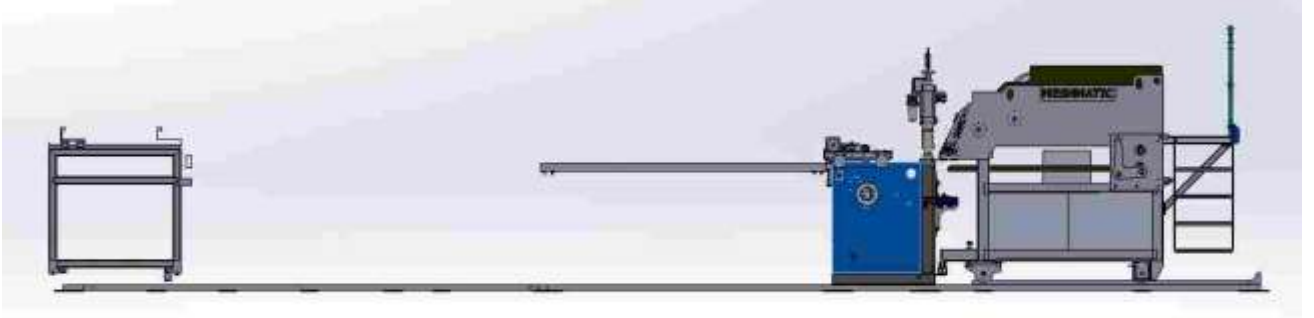

Capacity :

Machine speed :	90 strokes per minute
Width of the panel:	2600mm
Length of the panel:	6000mm
Diam.of the cross wire:	4-12mm
Diam. Of the line wire:	4-12mm
Space of cross wires:	50-300mm (adjustable on touch panel)
Space of line wires:	75-100-150-200-250mm

Needs :

Line Power	3x400V 800KVA
Cooling Water	Cooled, neutral, 80 liters per minute 1 -1/4"
Pressured Air	6 atm , 4 cubic meters per minute



Units of the Machine:

- 1) FEEDING MECHANISM OF LINE WIRES
- 2) WELDING UNIT
- 3) FEEDING OF CROSS WIRES
- 4) AUTOMATIC PACKING UNIT
- 5) ELECTRICAL CABINET

1) Equipped by Servo Motor. Feeding length is adjustable on the touch panel. It has 24 pcs grippers.

Feeding length:	50-300mm
Feeding system:	Servo motor
Grippers:	24 pcs
Control valves :	8 pcs high flow

2) The welding unit includes upper and lower electrodes and 9 pcs 150KVA welding transformers. The line wires come on the upper electrodes and cross wires from magazine on the line wires connected to the magnets, then welding cylinders press, transformers send high current electrical power for welding.

Welding transformers:	9 pcs 150KVA
Welding press cyls:	24 pcs 90mm tandem
Valves:	24 pcs high flow
Upper electrode holders:	12 pcs 75-100mm 8 pcs 150mm 6 pcs 200-250mm
Welding bars :	24 pcs , water cooled cooper
Down electrode holders:	24 pcs water cooled
Magnets :	6 pcs (sensing capability)

3) The magnetic carrier takes a few cross wires to the mini magazine.

Servo motor activated separator disc takes the cross wires one to one.

Pneumatic activated strikers pushes the cross wire to the magnets.

Capacity of the cross wire magazin :	1000 kg
Motor of the magazin	1.1kw, AC
Motor for cross wires:	0.75kw Servo
Cross wire separator:	4-8mm adjustable
Cross wire striker :	6 pcs

4) Polyuretan rolls pushes out the finished mesh panel.

Push out motor:	0.75kw AC
Push out rolls :	Polyuretan coated , 8 pcs

5) There are 9 pair disc SCR in the cabinet. PLC and motor control system are connected together. The system can connect to internet by way of ethernet.

PLC:	Panasonic - Mitsubishi
Touch panel:	Delta -Mitsubishi
Inverters:	Mitsubishi
Servomotors:	Mitsubishi
Electrical components:	Schneider
Welding system:	PLC controlled SCR pairs 9 sets